

Advanced Monolithic Systems

AMS3100A-2.5

MICROPOWER VOLTAGE REFERENCE

FEATURES

- $\pm 12 \text{ mV}$ ($\pm 0.5\%$) max. initial tolerance (A grade)
- Operating Current $20\mu\text{A}$ to 20mA
- Low Voltage Reference 2.50V
- Max. 0.5Ω Dynamic Impedance (A grade)
- Low Temperature Coefficient
- SOT-23 Package Available
- $\pm 5\%$ Output Voltage Precision Trimming
- Low cost

APPLICATIONS

- Battery Powered Systems
- Instrumentation
- A/D, D/A Converters
- Temperature measurement
- Current sources
- Notebook/Personal Computer
- Monitors/ VCR/ TV
- Pagers

GENERAL DESCRIPTION

The AMS3100A-2.5 are two-terminal micropower band-gap voltage reference that feature a very low dynamic impedance and good temperature coefficient, operating over a $20\mu\text{A}$ to 20mA current range. AMS3100A-2.5 is trimmed at wafer test level to optimize the temperature coefficient and tight output voltage tolerance. The advanced process technology used, makes the AMS3100A-2.5 exceptionally tolerant of capacitive loading, making it easy to use in almost any reference application. The wide dynamic operating range allows its use with widely varying supplies with excellent regulation. The extremely low power drain, makes these reference diodes useful for micropower circuitry. These voltage references can be used to make portable meters, regulators or general purpose analog circuitry with battery life approaching shelf life. Further more, the wide operating current allows it to replace older references with a tight tolerance part. A third terminal allows the reference voltage to be adjusted to $\pm 5\%$ to calibrate out system errors.


The AMS3100A-2.5 is operating over a -40°C to 85°C temperature range and is available in the space saving SOT-23 package.

ORDERING INFORMATION:

| TOL. | PACKAGE TYPE | OPERATING |
|-------------------|----------------|---|
| | | TEMPERATURE RANGE |
| $\pm 12\text{mV}$ | AMS3100A-2.5AM | -40°C to 85°C |
| $\pm 25\text{mV}$ | AMS3100A-2.5BM | -40°C to 85°C |
| $\pm 25\text{mV}$ | AMS3100A-2.5CM | -40°C to 85°C |

PIN CONNECTIONS

**3L SOT-23
(M)**



A = Adjust pin.

Top View

ABSOLUTE MAXIMUM RATINGS

| | | | |
|-----------------------------|-----------------|--------------------------------------|---------|
| Reverse Current | 30mA | Lead Temperature | |
| Forward Current | 10mA | Vapor phase (60 sec) | 215°C |
| Operating Temperature Range | -40°C to 85°C | Infrared (15 sec.) | 220°C |
| Storage temperature | -55°C to +150°C | Thermal Resistance (θ_{JA}) | 410°C/W |

ELECTRICAL CHARACTERISTICSElectrical Characteristics at $I_R = 100 \mu A$, and $T_A = +25^\circ C$ unless otherwise specified.

| Parameter | Conditions | AMS3100A-2.5 | | | AMS3100B-2.5 | | | AMS3100C-2.5 | | | Units |
|--|---|--------------|-----------|-----------------|--------------|-----------|-----------------|--------------|------------|-----------------|--------------------|
| | | Min | Typ | Max | Min | Typ | Max | Min | Typ | Max | |
| Reverse Breakdown Voltage (Note 3) | $I_R - 100 \mu A$ | 2.488 | 2.500 | 2.512 | 2.475 | 2.500 | 2.525 | 2.450 | 2.500 | 2.550 | V |
| Reverse Dynamic Impedance (Note 3) | $I_R - 100 \mu A, f = 20Hz$ | | 0.2 | 0.60 | | 1 | | | 1 | | Ω |
| Reverse Breakdown Voltage Change with current (Note 3) | $10\mu A \leq I_R \leq 1mA$ $1mA \leq I_R \leq 20mA$ | | 1.0 10 | | | | 1.0 10 | | | 2.0 20 | mV |
| Min. Operating Current (Note 3) | | | 12 | 20 25 | | 13 | 20 30 | | 13 | 20 30 | μA μA |
| Wide Band Noise (Note 4) | $I_R - 100 \mu A,$ $10Hz \leq f \leq 10kHz$ | | 120 | | | 120 | | | 120 | | μV |
| Temperature Coeff. (Note 5) | | | 25 | | | 50 | | | 100 | 150 | ppm/ $^\circ C$ |
| Long Term Stability (Note 4) | $T_A = 25^\circ C \pm 1^\circ C$ $T = 1000 \text{ Hr}$ | | 20 | | | 20 | | | 20 | | ppm |



Note 1: Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but do not guarantee specific performance limits. For guaranteed specifications and test conditions, see the Electrical Characteristics. The guaranteed specifications apply only for the test conditions listed.

Note 2: Parameters identified with boldface type apply at temperature extremes. All other numbers apply at $T_A = T_J = 25^\circ C$.

Note 3: Guaranteed and 100% production tested










Note 4: Guaranteed but not 100% production tested. These limits are not used to calculate average outgoing quality levels.

Note 5: The average temperature coefficient is defined as the maximum deviation of reference voltage at all measured temperatures between the operating T_{MAX} and T_{MIN} , divided by $T_{MAX} - T_{MIN}$. The measured temperatures are -40°C, 25°C and 85°C.

TYPICAL APPLICATIONS**2.5V Reference****Wide Supply Range, Adjustable Reference**

*Does not affect Temperature Coefficient

TYPICAL PERFORMANCE CHARACTERISTICS

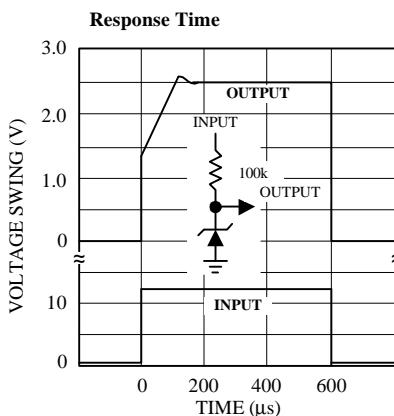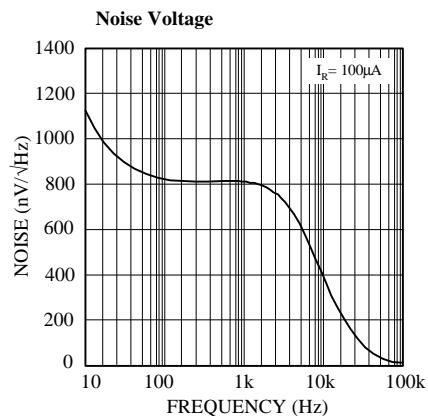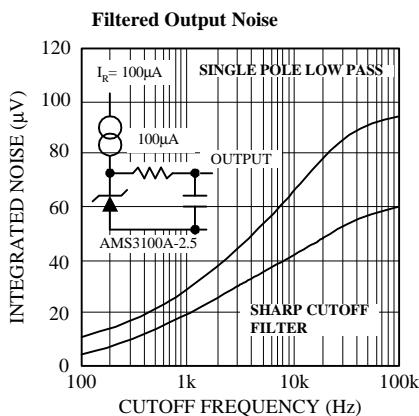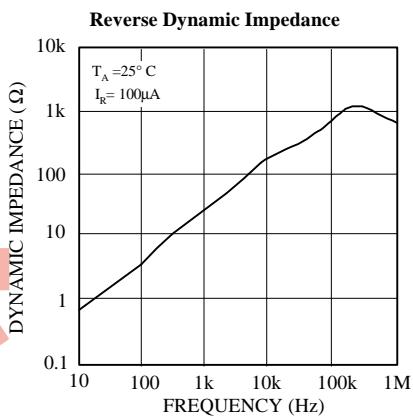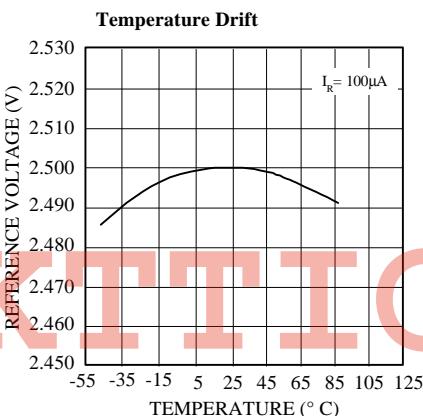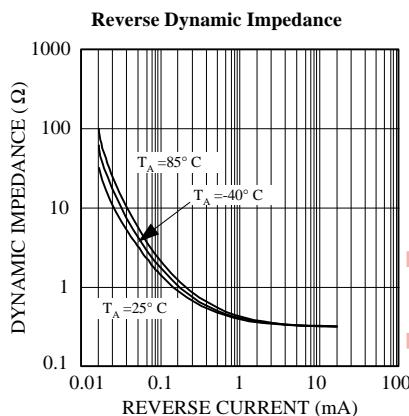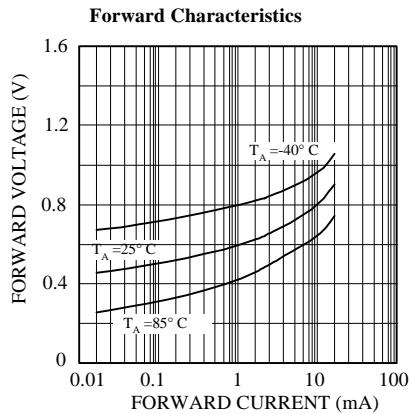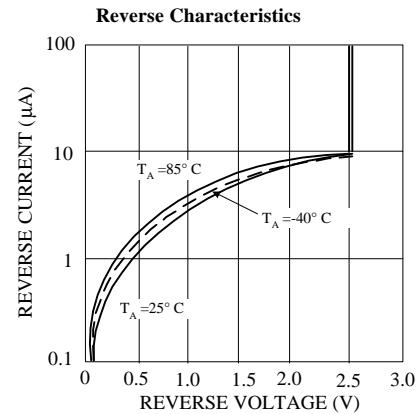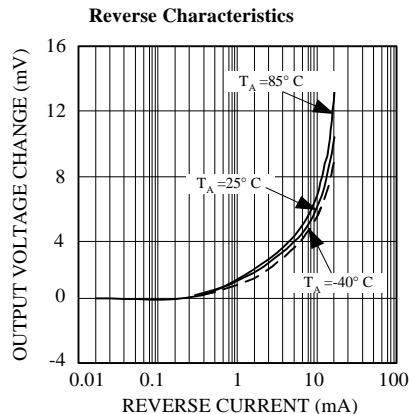

PACKAGE DIMENSIONS inches (millimeters) unless otherwise noted.

3 LEAD SOT-23 PLASTIC PACKAGE (M)

