

**DESCRIPTION**

The MGF4851A HEMT (High Electron Mobility Transistor) is designed for use in S to K band amplifiers and oscillators. The lead-less ceramic package assures minimum parasitic losses.

**FEATURES**

High gain and High P1dB  
 G1p=11dB , P1dB=14.5dBm (Typ.) @ f=12GHz

**APPLICATION**


S to K band power Amplifiers

**QUALITY GRADE**

GG

**ORDERING INFORMATION**

Tape & reel 3000pcs./reel

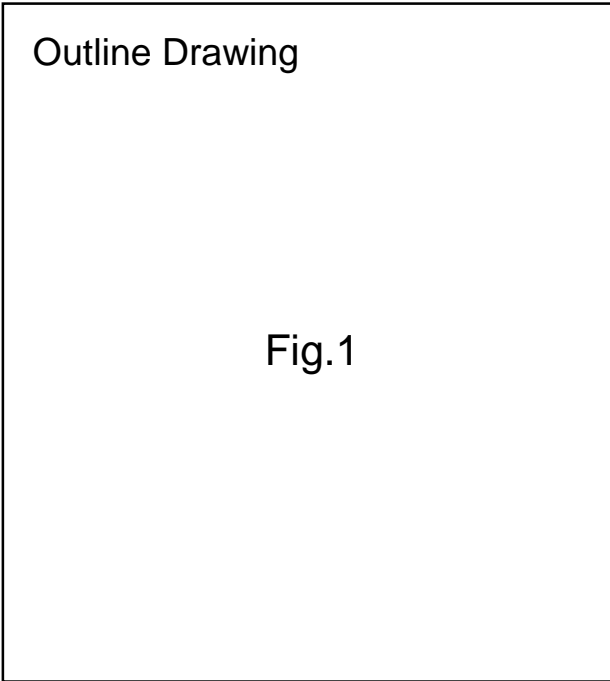

**ABSOLUTE MAXIMUM RATINGS** (Ta=25°C)

Symbol	Parameter	Ratings	Unit
V <sub>GDO</sub>	Gate to drain voltage	-5	V
V <sub>GSO</sub>	Gate to source voltage	-5	V
I <sub>D</sub>	Drain current	IDSS	mA
PT	Total power dissipation	100	mW
T <sub>ch</sub>	Channel temperature	125	°C
T <sub>stg</sub>	Storage temperature	-65~125	°C


**Keep Safety first in your circuit designs!**  
 Mitsubishi Electric Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measure such as (i) placement of substitutive, auxiliary circuits, (ii) use of non-flammable material or (iii) prevention against any malfunction or mishap.

**ELECTRICAL CHARACTERISTICS** (Ta=25°C)

Symbol	Parameter	Test conditions	Limits			Unit
			MIN.	TYP.	MAX	
V(BR)GDO	Gate to drain breakdown voltage	I <sub>g</sub> =-10μA	-5	-8	--	V
I <sub>DSS</sub>	Saturated drain current	V <sub>GS</sub> =0V, V <sub>DS</sub> =2.5V	35	60	120	mA
V <sub>GS(off)</sub>	Gate to source cut-off voltage	V <sub>DS</sub> =2.5V, I <sub>D</sub> =500μA	-0.1	-0.8	-2.0	V
P1dB	Output Power at 1dB gain Compression	V <sub>DS</sub> =2.5V, I <sub>D</sub> =25mA f=12GHz	12	14.5	--	dBm
G1p	Linear Power Gain	V <sub>DS</sub> =2.5V, I <sub>D</sub> =25mA f=12GHz, Pin=-5dBm	9	11	--	dB

Fig.1


Unit : mm

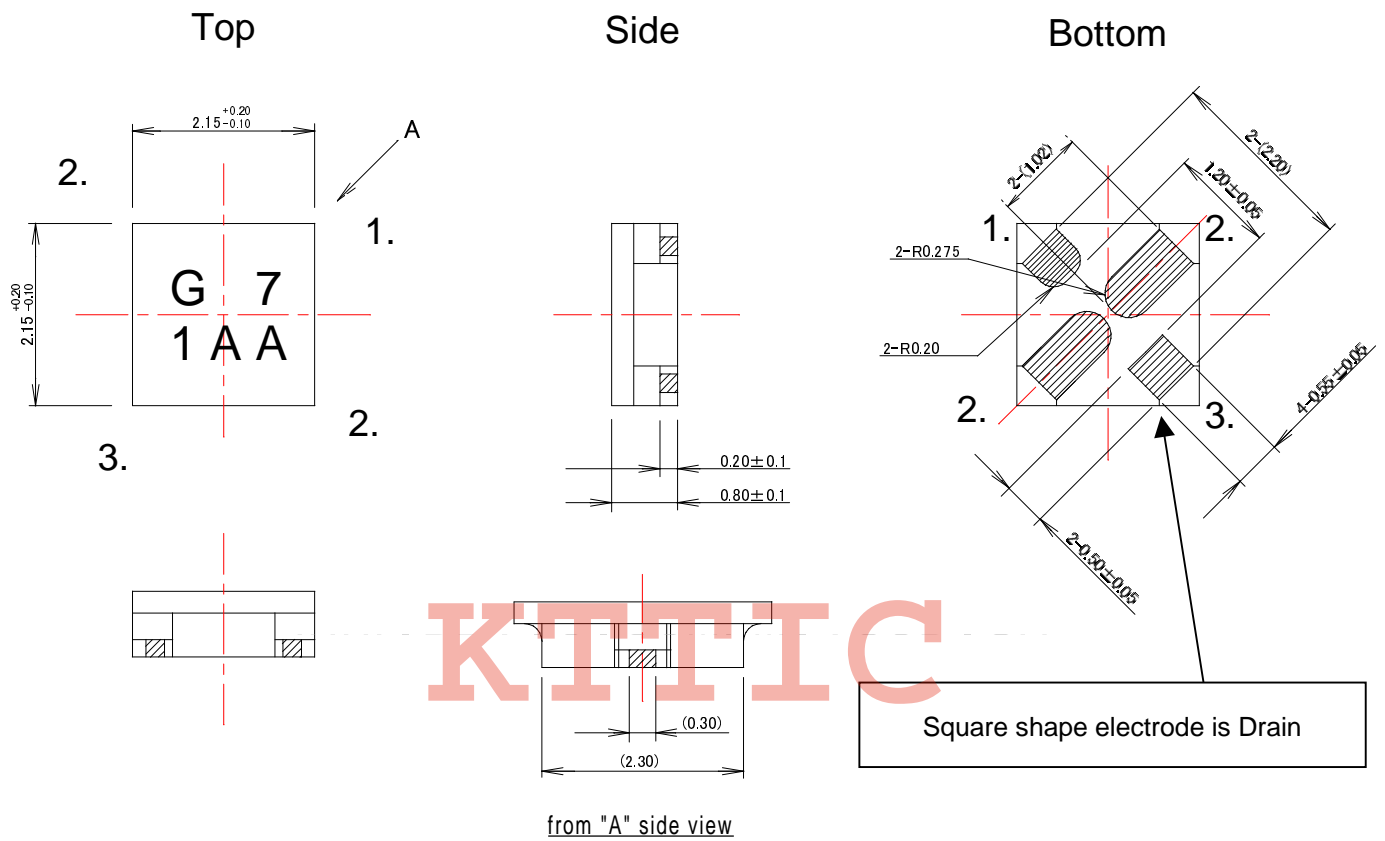


- 1. Gate
- 2. Source
- 3. Drain

TYPICAL CHARACTERISTICS (Ta=25°C)


ID vs. VDS

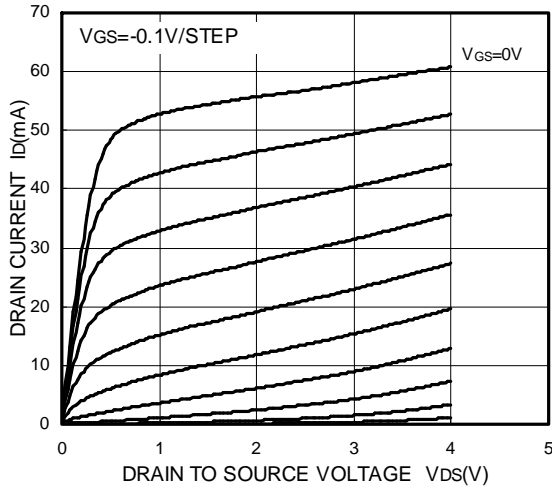


ID vs. VGS

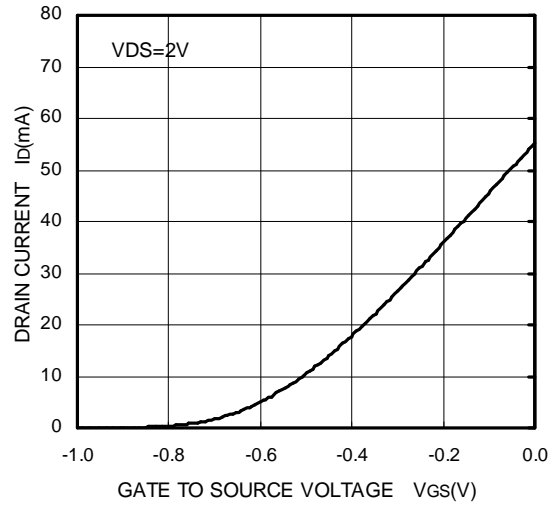

Po vs. Pin

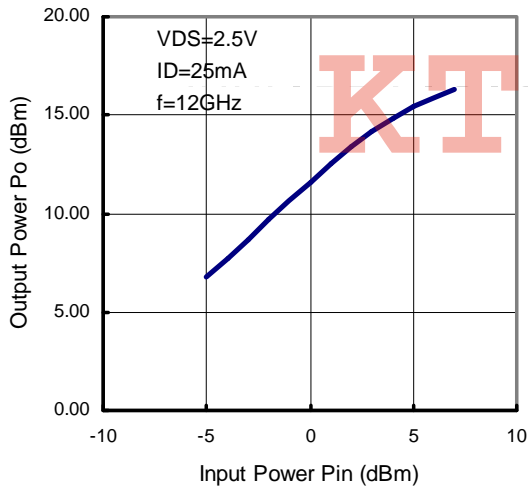


Po vs. Pin

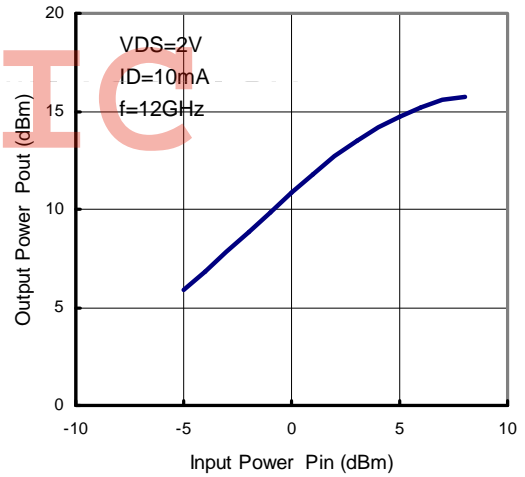

S PARAMETERS

(Conditions : VDS=2.5V, ID=25mA, Ta=25deg.C)

f (GHz)	S11		S21		S12		S22	
	Magn.	Angle	Magn.	Angle	Magn.	Angle	Magn.	Angle
1	0.986	-16.1	6.558	165.2	0.015	79.0	0.539	-13.6
2	0.959	-35.1	6.385	148.7	0.028	65.3	0.531	-30.0
3	0.933	-47.6	6.118	136.8	0.040	56.6	0.525	-38.9
4	0.898	-64.4	5.865	123.4	0.050	46.8	0.502	-49.8
5	0.867	-76.5	5.505	112.8	0.058	38.6	0.498	-58.1
6	0.840	-86.5	5.187	103.8	0.064	32.3	0.492	-63.8
7	0.813	-96.0	4.891	94.8	0.069	26.7	0.487	-67.9
8	0.792	-106.6	4.710	83.6	0.073	18.8	0.487	-74.3
9	0.766	-114.9	4.538	74.9	0.077	14.2	0.486	-77.8
10	0.744	-123.4	4.500	66.5	0.083	10.6	0.483	-81.1
11	0.709	-133.5	4.514	57.5	0.092	3.1	0.468	-86.3
12	0.658	-146.0	4.549	47.0	0.099	-4.6	0.437	-91.4
13	0.607	-160.7	4.589	36.3	0.106	-12.3	0.392	-97.5
14	0.561	176.4	4.607	20.9	0.113	-25.3	0.324	-109.3
15	0.523	151.0	4.547	7.2	0.116	-36.3	0.241	-118.6
16	0.542	123.0	4.470	-6.8	0.120	-48.5	0.140	-131.0
17	0.598	95.1	4.267	-21.7	0.119	-59.8	0.030	-165.6
18	0.679	70.3	3.880	-37.6	0.113	-71.3	0.097	-43.6
19	0.760	51.1	3.447	-51.9	0.105	-83.2	0.214	30.0
20	0.827	35.4	3.005	-65.2	0.094	-94.0	0.323	19.9
21	0.890	21.0	2.560	-80.4	0.084	-106.2	0.407	8.0
22	0.921	10.8	2.187	-90.3	0.074	-111.9	0.481	2.4
23	0.932	2.6	1.879	-100.1	0.064	-117.3	0.570	-2.3
24	0.933	-3.9	1.555	-108.1	0.056	-124.3	0.625	-6.3
25	0.947	-9.0	1.330	-114.7	0.049	-127.9	0.681	-7.6
26	0.947	-14.4	1.146	-121.8	0.042	-128.9	0.730	-8.8

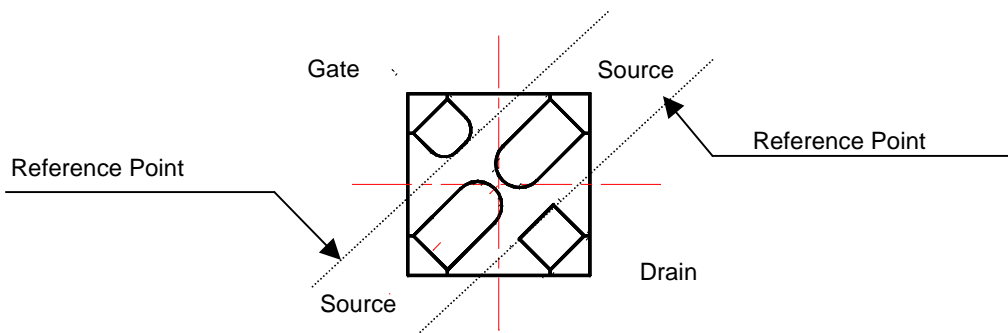

### Requests Regarding Safety Designs

Mitsubishi Electric constantly strives to raise the level of its quality and reliability. Despite these concerted efforts, however, there will be occasions when our semiconductor products suffer breakdowns, malfunctions or other problems. In view of this reality, it is requested that every feasible precaution be taken in the pursuit of redundancy design, malfunction prevention design and other safety-related designs, to prevent breakdowns or malfunctions in our products from resulting in accidents involving people, fires, social losses or other problems, thereby upholding the highest levels of safety in the products when in use by customers.

### Matters of Importance when Using these Materials

1. These materials are designed as reference materials to ensure that all customers purchase Mitsubishi Electric semiconductors best suited to their specific use applications. Please be aware, however, that the technical information contained in these materials does not comprise consent for the execution or use of intellectual property rights or other rights owned by Mitsubishi Electric Corporation.
2. Mitsubishi Electric does not assume responsibility for damages resulting from the use of product data, graphs, charts, programs, algorithms or other applied circuit examples described in these materials, or for the infringement of the rights of third-party owners resulting from such use.
3. The data, graphs, charts, programs, algorithms and all other information described in these materials were current at the issue of these materials, with Mitsubishi Electric reserving the right to make any necessary updates or changes in the products or specifications in these materials without prior notice. Before purchasing Mitsubishi Electric semiconductor products, therefore, please obtain the latest available information from Mitsubishi Electric directly or an authorized dealer.
4. Every possible effort has been made to ensure that the information described in these materials is fully accurate. However, Mitsubishi Electric assumes no responsibility for damages resulting from inaccuracies occurring within these materials.
5. When using the product data, technical contents indicated on the graphs, charts, programs or algorithms described in these materials, assessments should not be limited to only the technical contents, programs and algorithm units. Rather, it is requested that ample evaluations be made of each individual system as a whole, with the customer assuming full responsibility for decisions on the propriety of application. Mitsubishi Electric does not accept responsibility for the propriety of application.
6. The products described in these materials, with the exception of special mention concerning use and reliability, have been designed and manufactured with the purpose of use in general electronic machinery. Accordingly these products have not been designed and manufactured with the purpose of application in machinery or systems that will be used under conditions that can affect human life, or in machinery or systems used in social infrastructure that demand a particularly high degree of reliability. When considering the use of the products described in these materials in transportation machinery (automobiles, trains, vessels), for objectives related to medical treatment, aerospace, nuclear power control, submarine repeaters or systems or other specialized applications, please consult with Mitsubishi Electric directly or an authorized dealer.
7. When considering use of products for purposes other than the specific applications described in these materials, please inquire at Mitsubishi Electric or an authorized dealer.
8. The prior consent of Mitsubishi Electric in writing is required for any reprinting or reproduction of these materials.
9. Please direct any inquiries regarding further details of these materials, or any other comments or matters of attention, to Mitsubishi Electric or an authorized dealer.