




THJ Series with Extension to 200°C

High Temperature Tantalum Chip Capacitor



- SMD 200°C tantalum capacitor
- 200°C @ 0.33V_R 1000hrs continuous operation
- Leakage current after 200°C 1000hrs less than 1mA
- 3x reflow 260°C
- Gold plated termination for hybrid assembly
- Oil drilling, aerospace, automotive applications
- CV range: 100-220µF / 10-16V

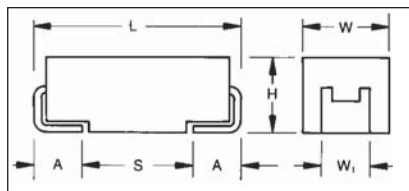

For part marking see page 132

CASE DIMENSIONS: millimeters (inches)

Code	EIA Code	EIA Metric	L±0.20 (0.008)	W+0.20 (0.008) -0.10 (0.004)	H+0.20 (0.008) -0.10 (0.004)	W ₁ ±0.20 (0.008)	A+0.30 (0.012) -0.20 (0.008)	S Min.
E	2917	7343-43	7.30 (0.287)	4.30 (0.169)	4.10 (0.162)	2.40 (0.094)	1.30 (0.051)	4.40 (0.173)

W₁ dimension applies to the termination width for A dimensional area only.


HOW TO ORDER

THJ | **E** | **107**

Type
See table above

Case Size
See table above

Capacitance Code
pF code: 1st two digits represent significant figures
3rd digit represents multiplier (number of zeros to follow)

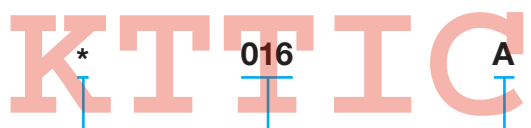

***** | **016** | **A** | **JH**

Tolerance
K=±10%
M=±20%

Rated DC Voltage
010=10Vdc
016=16Vdc

Packaging
A = Gold Plating 7" Reel
B = Gold Plating 13" Reel

Standard Suffix

TECHNICAL SPECIFICATIONS

Technical Data:	All technical data relate to an ambient temperature of +25°C		
Capacitance Range:	100 µF to 220 µF		
Capacitance Tolerance:	±10%; ±20%		
Leakage Current DCL @ V _R 25°C	0.01CV		
Leakage Current DCL @ V _C 200°C, 1000 hrs	1mA		
Rated Voltage (V _R)	≤ +85°C:	10	16
Category Voltage (V _C)	≤ +200°C:	3.3	5.3
Surge Voltage (V _S)	≤ +85°C:	13	20
Surge Voltage (V _S)	≤ +200°C:	4.3	6.5
Temperature Range:	-55°C up 200°C with voltage derating		
Reliability:	0.5% per 1000 hours at 85°C, V _R with 0.1Ω/V series impedance, 1000 hrs at 200°C, 0.33V _R		
Termination Finished:	Gold Plating		
	Meets requirements of AEC-Q200		



THJ Series with Extension to 200°C

High Temperature Tantalum Chip Capacitor

CAPACITANCE AND VOLTAGE RANGE (LETTER DENOTES CASE SIZE)

Capacitance		Rated voltage (V _R) to 85°C (Voltage Code)						
µF	Code	6.3V (J)	10V (A)	16V (C)	20V (D)	25V (E)	35V (V)	50V (T)
33	336							
47	476							
68	686							
100	107			E				
150	157		E					
220	227							
330	337							
470	477							
680	687							

Available Ratings

Engineering samples - please contact manufacturer

*Codes under development – subject to change

Note: Voltage ratings are minimum values. AVX reserves the right to supply higher ratings in the same case size, to the same reliability standards

RATINGS & PART NUMBER REFERENCE

AVX Part No.	Case Size	Cap (µF)	Rated Voltage (V)	DCL (µA) Max. @ V _R 25°C	DCL (mA) Max. @ V _C 200°C 1000hrs	DF % Max.	ESR Max. (mΩ) @ 100kHz	100kHz RMS Current (mA)				100kHz RMS Voltage (mV)			
								25°C	85°C	175°C	200°C	25°C	85°C	175°C	200°C
10 Volt @ 85°C (6.6 Volt @ 125°C)															
THJE227*010#JH	E	220	10	22	1.0	10	0.25	812	731	162	81	203	183	41	20
16 Volt @ 85°C (10 Volt @ 125°C)															
THJE107*016#JH	E	100	16	16	1.0	8	0.25	812	731	162	81	203	183	41	20

*Insert K for ±10% and M for ±20% capacitance tolerance

Gold Plating – Insert A for 7" reel and B for 13" reel

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5RMS with DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

THJ series is MSL level 1 according to J-STD-020C.

NOTE: AVX reserves the right to supply a higher voltage rating or tighter tolerance part in the same case size, to the same reliability standards.

