


Tantalum Solid Electrolytic Chip Capacitors High CV Consumer Series




- High Volumetric Efficiency
- 3x reflow 260°C compatible
- 13 case sizes available including low profile codes
- Environmentally friendly
- Consumer applications (e.g. mobiles phones, PDA etc.)
- CV range: 10-680µF / 2.5-20V

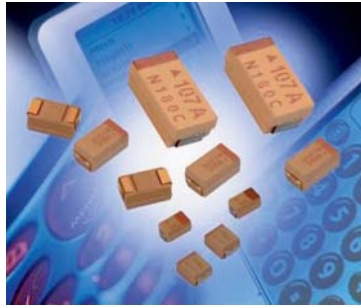

LEAD-FREE
LEAD-FREE COMPATIBLE
COMPONENT

CASE DIMENSIONS: millimeters (inches)

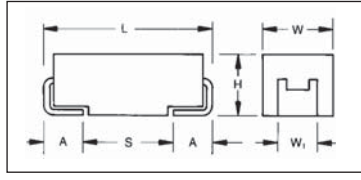

For part marking see page 132

Code	EIA Code	EIA Metric	L±0.20 (0.008)	W+0.20 (0.008) -0.10 (0.004)	H+0.20 (0.008) -0.10 (0.004)	W ₁ ±0.20 (0.008)	A+0.30 (0.012) -0.20 (0.008)	S Min.
A	1206	3216-18	3.20 (0.126)	1.60 (0.063)	1.60 (0.063)	1.20 (0.047)	0.80 (0.031)	1.10 (0.043)
B	1210	3528-21	3.50 (0.138)	2.80 (0.110)	1.90 (0.075)	2.20 (0.087)	0.80 (0.031)	1.40 (0.055)
F	2312	6032-20	6.00 (0.236)	3.20 (0.126)	2.00 (0.079) max.	2.20 (0.087)	1.30 (0.051)	2.90 (0.114)
G	1206	3216-15	3.20 (0.126)	1.60 (0.063)	1.50 (0.059) max	1.20 (0.047)	0.80 (0.031)	1.10 (0.043)
H	1210	3528-15	3.50 (0.138)	2.80 (0.110)	1.50 (0.059) max	2.20 (0.087)	0.80 (0.031)	1.40 (0.055)
K	1206	3216-10	3.20 (0.126)	1.60 (0.063)	1.0 (0.039) max	1.20 (0.047)	0.80 (0.031)	1.10 (0.043)
N	0805	2013-10	2.05 (0.081)	1.3 (0.051)	1.0 (0.039) max	1.0 (0.039)	0.5 (0.020)	0.85 (0.033)
P	0805	2012-15	2.05 (0.081)	1.35 (0.053)	1.50 (0.059) max	1.0±0.1 (0.039±0.004)	0.50 (0.020)	0.85 (0.033)
R	0805	2012-12	2.05 (0.081)	1.30 (0.051)	1.20 (0.047) max	1.0±0.1 (0.039±0.004)	0.50 (0.020)	0.85 (0.033)
S	1206	3216-12	3.20 (0.126)	1.60 (0.063)	1.20 (0.047) max	1.20 (0.047)	0.80 (0.031)	1.10 (0.043)
T	1210	3528-12	3.50 (0.138)	2.80 (0.110)	1.20 (0.047) max	2.20 (0.087)	0.80 (0.031)	1.40 (0.033)
W	2312	6032-15	6.00 (0.236)	3.20 (0.126)	1.50 (0.059) max	2.20 (0.087)	1.30 (0.051)	2.90 (0.114)
Y	2917	7343-20	7.30 (0.287)	4.30 (0.169)	2.00 (0.079) max	2.40 (0.094)	1.30 (0.051)	4.40 (0.173)

W₁ dimension applies to the termination width for A dimensional area only.

HOW TO ORDER

TLJ
Type

W
Case Size
See table above

157
Capacitance Code
pF code: 1st two digits represent significant figures, 3rd digit represents multiplier (number of zeros to follow)

M
Tolerance
M = ±20%

010
Rated DC Voltage
002 = 2.5Vdc
004 = 4Vdc
006 = 6.3Vdc
010 = 10Vdc
016 = 16Vdc
020 = 20Vdc

R
Packaging
R = 7" T/R
S = 13" T/R

0200
ESR in mΩ

TECHNICAL SPECIFICATIONS

Technical Data:	All technical data relate to an ambient temperature of +25°C							
Capacitance Range:	10 µF to 1500 µF							
Capacitance Tolerance:	±20%							
Rated Voltage (V _R)	-55°C ≤ +40°C:	2.5	4	6.3	10	16	20	
Category Voltage (V _C)	at 85°C:	1.25	2	3.15	5	8	10	
Category Voltage (V _C)	at 125°C:	0.5	0.8	1.26	2	3.2	4	
Temperature Range:	-55°C to +125°C with category voltage							
Reliability:	0.2% per 1000 hours at 85°C, 0.5xV _R with 0.1Ω/V series impedance with 60% confidence level							



TLJ Series

Tantalum Solid Electrolytic Chip Capacitors High CV Consumer Series

CAPACITANCE AND RATED VOLTAGE, VR (VOLTAGE CODE) RANGE (LETTER DENOTES CASE SIZE)

Capacitance		Rated Voltage DC to 40°C / 0.5DC to 85°C / 0.2DC to 125°C						
μF	Code	2.5V (e)	4V (G)	6.3V (J)	10V (A)	16V (C)	20V (D)	35V (V)
6.8	685							
10	106				R(2000,3000)	S(2200)	T(1000)	
15	156				R(2000)			
22	226			N(5400)/R(3500)	K(1800)/N(3800) R(3800)	T(1000)		
33	336		N(8000)/R(3000)	K(1700)/N(8000) P(3000)/R(3000)	K(1500)/N(9600) P(3500) R(3500)/S(1500)	T(1000)		
47	476		K(1500)/N(4000) P(3000)/R(3000)	K(1500)/N(8300) P(700,900,1800,2500) R(3200)/S(1500)	A(600)/G(1500) P(3200)/R(3200) S(1500)/T(600)			
68	686		K(1200)/N(8000) P(3000) R(2900)/S(1500)	A(500)/G(800) S(1500)/T(600)	A(1500)			
100	107		A(500)/G(800) N(5200)/P(2700) S(1400)	A(500,800)/G(800) P(5400)/T(800)	A(1400) H(900)/T(900)			
150	157		A(800)/T(800)	A(900)/G(2500) H(900)/T(1200)	B(500) W(150,200)			
220	227	T(1100)	A(1100)/G(3000) H(900)/T(1100)	B(500)/T(2000) W(200)	B(1100)/F(300)			
330	337		T(2700)/W(200)	F(300)				
470	477							
680	687			Y(150)				
1000	108							
1500	158			V(200)*				

Available Ratings, (ESR ratings in mOhms in brackets)

Engineering samples - please contact manufacturer

*Codes under development - subject to change

Note: Voltage ratings are minimum values. AVX reserves the right to supply higher ratings in the same case size, to the same reliability standards.



**Tantalum Solid Electrolytic Chip Capacitors
 High CV Consumer Series**

RATINGS & PART NUMBER REFERENCE

AVX Part No.	Case Size	Capacitance (µF)	Rated Voltage (V)	Maximum Surge Current (A)*	DCL (µA) Max.	ESR Max. (mΩ) @100kHz	100kHz Ripple Current (mA)			100kHz Ripple Voltage (mV)		
							25°C	85°C	125°C	25°C	85°C	125°C
2.5 Volt @ 40°C (1.25 Volt @ 85°C, 0.5 Volt @ 125°C)												
TLJT227M002#1200	T	220	2.5	0.8	5.5	1100	365	329	146	219	197	88
4 Volt @ 40°C (2 Volt @ 85°C, 0.8 Volt @ 125°C)												
TLJN336M004#8000	N	33	4	0.2	1.3	8000	79	71	32	632	569	253
TLJR336M004#3000	R	33	4	0.6	1.3	3000	135	122	54	406	366	162
TLJK476M004#1500	K	47	4	1.0	1.9	1500	208	187	83	312	281	125
TLJN476M004#4000	N	47	4	0.6	1.9	4000	112	101	45	447	402	179
TLJP476M004#3000	P	47	4	0.6	1.9	3000	141	127	57	424	382	170
TLJR476M004#3000	R	47	4	0.6	1.9	3000	135	122	54	406	366	162
TLJK686M004#1200	K	68	4	1.2	2.7	1200	233	209	93	279	251	112
TLJN686M004#8000	N	68	4	0.2	5.4	8000	79	71	32	632	569	253
TLJP686M004#3000	P	68	4	1.2	2.7	3000	141	127	57	424	382	170
TLJR686M004#2900	R	68	4	0.6	2.7	2900	138	124	55	399	359	160
TLJS686M004#1500	S	68	4	1.0	2.7	1500	208	187	83	312	281	125
TLJA107M004#0500	A	100	4	2.1	4.0	500	387	349	155	194	174	77
TLJG107M004#0800	G	100	4	1.6	4.0	800	296	266	118	237	213	95
TLJN107M004#5200	N	100	4	0.4	8.0	5200	98	88	39	510	459	204
TLJP107M004#2700	P	100	4	0.6	8.0	2700	149	134	60	402	362	161
TLJS107M004#1400	S	100	4	1.1	4.0	1400	208	187	83	312	281	125
TLJA157M004#0800	A	150	4	1.6	6.0	800	306	276	122	245	220	98
TLJT157M004#0800	T	150	4	1.6	6.0	800	316	285	126	253	228	101
TLJA227M004#1100	A	220	4	1.3	17.6	1100	261	235	104	287	259	115
TLJG227M004#3000	G	220	4	0.6	17.6	3000	153	137	61	458	412	183
TLJH227M004#0900	H	220	4	1.5	8.8	900	298	268	119	268	241	107
TLJT227M004#1100	T	220	4	1.3	17.6	1100	316	285	126	253	228	101
TLJT337M004#2700	T	330	4	0.6	26.4	2700	172	155	69	465	418	186
TLJW337M004#0200	W	330	4	3.1	13.2	200	671	604	268	134	121	54
6.3 Volt @ 40°C (3.15 Volt @ 85°C, 1.26 Volt @ 125°C)												
TLJN226M006#5400	N	22	6.3	0.5	1.3	5400	96	87	38	520	468	208
TLJR226M006#3500	R	22	6.3	0.8	1.3	3500	125	113	50	439	395	175
TLJK336M006#1700	K	33	6.3	1.5	2.0	1700	196	176	78	332	299	133
TLJN336M006#8000	N	33	6.3	0.4	2.0	8000	79	71	32	632	569	253
TLJP336M006#3000	P	33	6.3	0.9	2.0	3000	141	127	57	424	382	170
TLJR336M006#3000	R	33	6.3	0.9	2.0	3000	135	122	54	406	366	162
TLJK476M006#1500	K	47	6.3	1.6	2.8	1500	208	187	83	312	281	125
TLJN476M006#8300	N	47	6.3	0.4	5.6	8300	78	70	31	644	580	258
TLJP476M006#0700	P	47	6.3	2.7	2.8	700	293	263	117	205	184	82
TLJP476M006#0900	P	47	6.3	2.3	2.8	900	258	232	103	232	209	93
TLJP476M006#1800	P	47	6.3	1.4	2.8	1800	183	164	73	329	296	131
TLJP476M006#2500	P	47	6.3	1.1	2.8	2500	155	139	62	387	349	155
TLJR476M006#3200	R	47	6.3	0.9	2.8	3200	131	118	52	420	378	168
TLJS476M006#1500	S	47	6.3	1.6	2.8	1500	208	187	83	312	281	125
TLJA686M006#0500	A	68	6.3	3.3	4.1	500	387	349	155	194	174	77
TLJG686M006#0800	G	68	6.3	1.9	4.1	800	242	217	97	290	261	116
TLJS686M006#1500	S	68	6.3	1.6	4.1	1500	208	187	83	312	281	125
TLJT686M006#0600	T	68	6.3	3.0	4.1	600	365	329	146	219	197	88
TLJA107M006#0500	A	100	6.3	3.3	6.0	500	387	349	155	194	174	77
TLJA107M006#0800	A	100	6.3	2.5	6.0	800	306	276	122	245	220	98
TLJG107M006#0800	G	100	6.3	2.5	6.0	800	296	266	118	237	213	95
TLJP107M006#5400	P	100	6.3	0.5	12.0	5400	105	95	42	596	512	228
TLJT107M006#0800	T	100	6.3	2.5	6.0	800	316	285	126	253	228	101
TLJA157M006#0900	A	150	6.3	2.3	9.0	900	289	260	115	260	234	104
TLJG157M006#2500	G	150	6.3	1.1	18.0	2500	167	151	67	418	376	167
TLJH157M006#0900	H	150	6.3	2.3	9.0	900	298	268	119	268	241	107
TLJT157M006#1200	T	150	6.3	1.9	9.0	1200	316	285	126	253	228	101
TLJB227M006#0500	B	220	6.3	3.3	13.2	500	412	371	165	206	186	82
TLJT227M006#2000	T	220	6.3	1.3	26.4	2000	200	180	80	400	360	160
TLJW227M006#0200	W	220	6.3	4.8	13.2	200	671	604	268	134	121	54
TLJF337M006#0300	F	330	6.3	4.2	19.8	300	577	520	231	173	156	69
TLJY687M006#0150	Y	680	6.3	5.7	40.8	150	913	822	365	137	123	55

insert R for 7" reel or S for 13" reel

All technical data relates to an ambient temperature of +25°C. Capacitance is measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes. TLJ series is MSL level 3 according to J-STD-020C.

ESR allowed to move up to 1.25 times catalogue limit post mounting
 DCL allowed to move up to 2.00 times catalogue limit post mounting

NOTE: AVX reserves the right to supply a higher voltage rating in the same case size, to the same reliability standards.



**Tantalum Solid Electrolytic Chip Capacitors
 High CV Consumer Series**

RATINGS & PART NUMBER REFERENCE

AVX Part No.	Case Size	Capacitance (µF)	Rated Voltage (V)	Maximum Surge Current (A)*	DCL (µA) Max.	ESR Max. (mΩ) @100kHz	100kHz Ripple Current (mA)			100kHz Ripple Voltage (mV)		
							25°C	85°C	125°C	25°C	85°C	125°C
10 Volt @ 40°C (5 Volt @ 85°C, 2 Volt @ 125°C)												
TLJR106M010#2000	R	10	10	2.0	1.0	2000	166	149	66	332	298	133
TLJR106M010#3000	R	10	10	1.4	1.0	3000	135	122	54	406	366	162
TLJR156M010#2000	R	15	10	2.0	1.5	2000	166	149	66	332	298	133
TLJK226M010#1800	K	22	10	2.2	2.2	1800	190	171	76	342	308	137
TLJN226M010#3800	N	22	10	1.2	2.2	3800	115	103	46	436	392	174
TLJR226M010#3800	R	22	10	1.2	2.2	3800	120	108	48	457	411	183
TLJK336M010#1500	K	33	10	2.6	3.3	1500	208	187	83	312	281	125
TLJN336M010#9600	N	33	10	0.5	6.6	9600	72	65	29	693	624	277
TLJP336M010#3500	P	33	10	1.3	3.3	3500	141	127	57	424	382	170
TLJR336M010#3500	R	33	10	1.3	3.3	3500	125	113	50	439	395	175
TLJS336M010#1500	S	33	10	2.6	3.3	1500	208	187	83	312	281	125
TLJA476M010#0600	A	47	10	4.8	4.7	600	354	318	141	212	191	85
TLJG476M010#1500	G	47	10	2.6	4.7	1500	216	194	86	324	292	130
TLJP476M010#3200	P	47	10	1.4	4.7	3200	137	123	55	438	394	175
TLJR476M010#3200	R	47	10	1.4	18.8	3200	131	118	52	420	378	168
TLJS476M010#1500	S	47	10	2.6	4.7	1500	208	187	83	312	281	125
TLJT476M010#0600	T	47	10	4.8	4.7	600	365	329	146	219	197	88
TLJA686M010#1500	A	68	10	2.6	6.8	1500	224	201	89	335	302	134
TLJA107M010#1400	A	100	10	2.7	10.0	1400	231	208	93	324	292	130
TLJH107M010#0900	H	100	10	3.7	10.0	900	298	268	119	268	241	107
TLJT107M010#0900	T	100	10	3.7	10.0	900	298	268	119	268	241	107
TLJB157M010#0500	B	150	10	5.3	15.0	500	412	371	165	206	186	82
TLJW157M010#0150	W	150	10	8.3	15.0	150	775	697	310	116	105	46
TLJW157M010#0200	W	150	10	7.7	15.0	200	671	604	268	134	121	54
TLJB227M010#1100	B	220	10	3.2	22.0	1100	278	250	111	306	275	122
TLJF227M010#0300	F	220	10	6.7	22.0	300	577	520	231	173	156	69
16 Volt @ 40°C (8 Volt @ 85°C, 3.2 Volt @ 125°C)												
TLJS106M016#2200	S	10	16	3.0	1.6	2200	172	155	69	378	340	151
TLJT226M016#1000	T	22	16	5.5	3.5	1000	283	255	113	283	255	113
TLJT336M016#1000	T	33	16	5.5	5.3	1000	283	255	113	283	255	113
20 Volt @ 40°C (10 Volt @ 85°C, 4 Volt @ 125°C)												
TLJT106M020#1000	T	10	20	6.9	2.0	1000	283	255	113	283	255	113

insert R for 7" reel or S for 13" reel

All technical data relates to an ambient temperature of +25°C. Capacitance is measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes. TLJ series is MSL level 3 according to J-STD-020C.

ESR allowed to move up to 1.25 times catalogue limit post mounting
 DCL allowed to move up to 2.00 times catalogue limit post mounting

NOTE: AVX reserves the right to supply a higher voltage rating in the same case size, to the same reliability standards.

