




◆ DIMENSIONS

(mm)

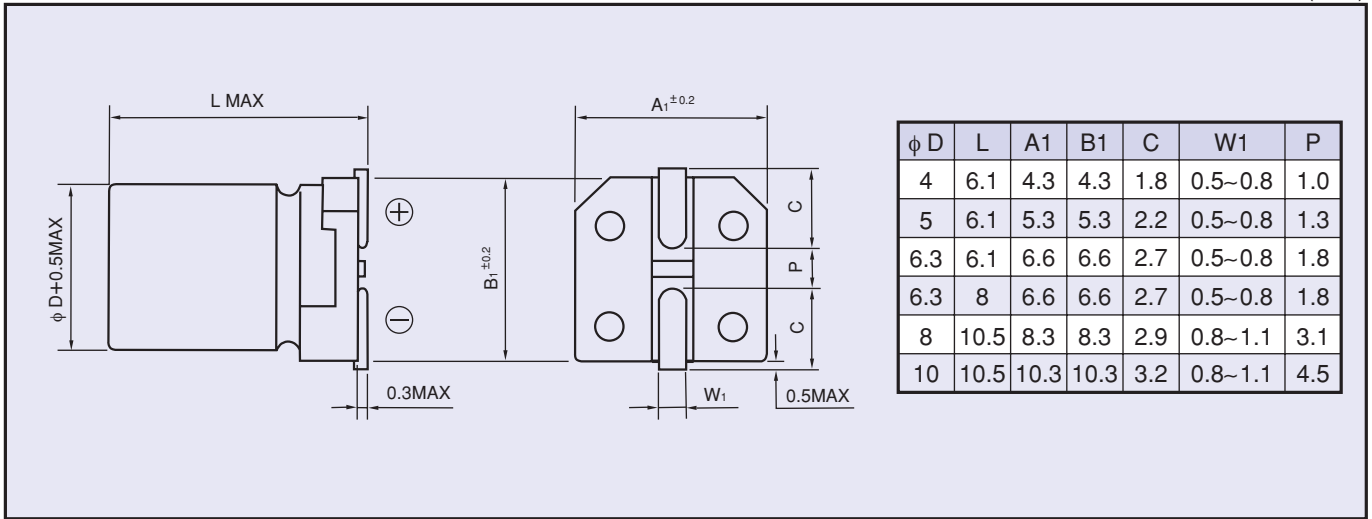

◆ STANDARD SIZE

Size φ D×L(mm), Ripple Current (mA r.m.s./105°C, 100kHz), Impedance(Ω MAX/20°C, 100kHz)

Cap(μF)	WV (V.DC)	6.3 (0J)			10 (1A)			16 (1C)		
		Size	Ripple	Z	Size	Ripple	Z	Size	Ripple	Z
10								4×6.1	90	1.35
22	4×6.1	90	1.35	4×6.1	90	1.35	4×6.1	90	1.35	
							5×6.1	170	0.70	
33				4×6.1	90	1.35	5×6.1	170	0.70	
47	4×6.1	90	1.35	6.3×6.1	250	0.36	5×6.1	170	0.70	
	5×6.1	170	0.70				6.3×6.1	250	0.36	
100	5×6.1	170	0.70	6.3×8	300	0.34	6.3×6.1	250	0.36	
	6.3×6.1	250	0.36				6.3×8	300	0.34	
220	6.3×6.1	250	0.36	6.3×8	300	0.34	6.3×8	300	0.34	
	6.3×8	300	0.34							
330							8×10.5	600	0.16	
470				8×10.5	600	0.16	8×10.5	600	0.16	
680				8×10.5	600	0.16	10×10.5	850	0.08	
1000				10×10.5	850	0.08				

Cap(μF)	WV (V.DC)	25 (1E)			35 (1V)			50 (1H)		
		Size	Ripple	Z	Size	Ripple	Z	Size	Ripple	Z
4.7					4×6.1	90	1.45	4×6.1	60	2.90
10					4×6.1	90	1.45	5×6.1	85	1.52
					5×6.1	170	0.70	6.3×6.1	165	0.88
22					5×6.1	170	0.70	6.3×6.1	165	0.88
					6.3×6.1	250	0.36			
33					6.3×6.1	250	0.36	6.3×8	195	0.68
					5×6.1	170	0.70	6.3×8	195	0.68
47					6.3×6.1	250	0.36			
					6.3×6.1	250	0.36			
100					6.3×8	300	0.34	8×10.5	350	0.34
					8×10.5	600	0.16			
220					8×10.5	600	0.16	10×10.5	670	0.18
330					10×10.5	850	0.09			
470										